


# Scully Thermistor Socket

## Overfill Prevention For Road Tankers with 1-8 Compartments

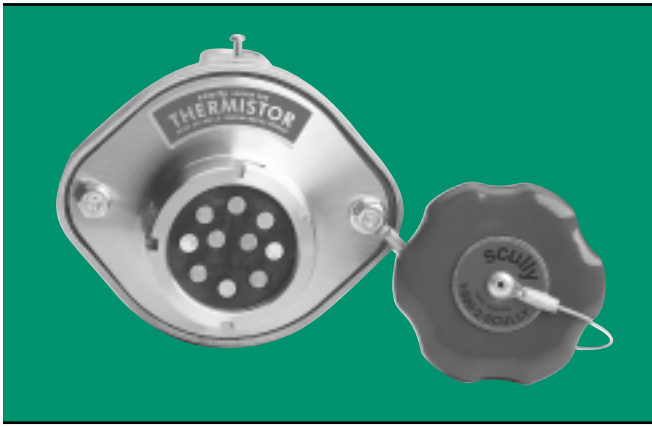


*Scully Thermistor Socket with Polyvinyl Cap*

- Use with Scully thermistor sensors
- Rugged construction
- Incorporates electronic dummy for tankers with less than eight compartments
- Easy installation on tanker chassis
- Accommodates top and bottom loading

### Description

The Scully Thermistor socket is used to connect up to 8 tanker mounted thermistor sensors to the Scully Biclops® III Overfill Prevention Monitor via the Scully Sculcon® Plug and Cable Unit.

- Lightweight polyvinyl cap is included
- Available with integral brake interlock switch for top loading
- Pins for tanker earthing incorporated
- Optional mounting bracket with threaded captive plate and bolts for top loading socket
- Optional integral pressure switch for vapor recovery

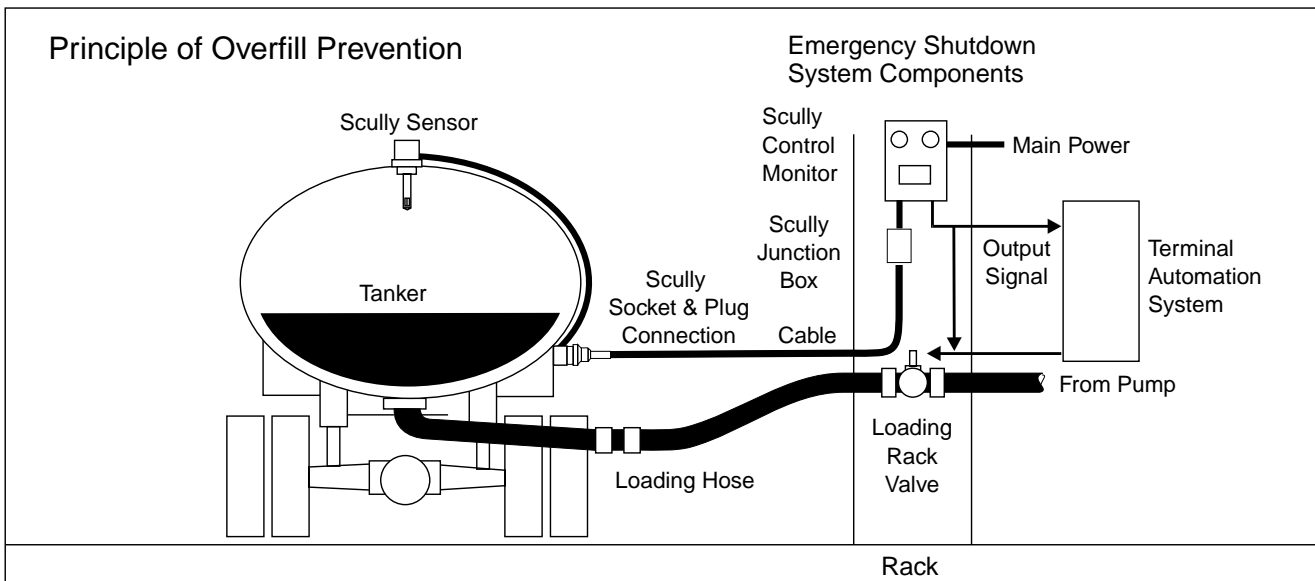

*Setting New Standards In Safety*

67151 Rev A